

Packaging - Specification container for transport


SCHÜTZ

**ECOBULK MX 1000 UN / DN150 TPE-g., G2-plug with
vent / scr. ball-valve, FPM-g. / 2 label plates /
Steel-framepallet**

SCHÜTZ GmbH & Co.KGaA
Schützstraße 12
D 56242 Selters / Germany

Date: 30.08.2006 / TE-KO / ss
Page 1 from 2

Article - No.: 4004382

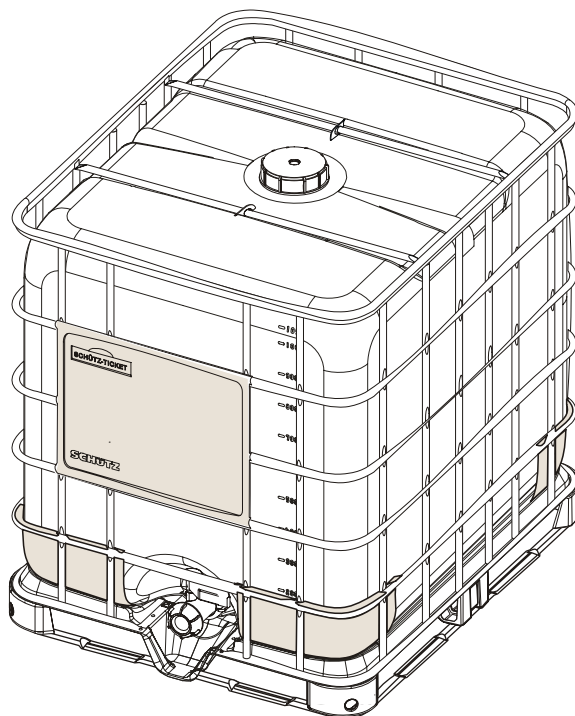

Technical data:

Nominal Capacity:	1000	Litre
Brimful Capacity:	1050	Litre
Length:	1200	mm
Width:	1000	mm
Height with pallet:	1160	mm
Filling opening:	150	mm
Discharge opening:	50	mm
Fork opening:	100	mm
Label plate:	2	piece
Corner Protector:	4	piece
Weight:	Inner container:	15,5 kg
	Total approx:	57 kg

Technical subjects to change, all dimensions approximately

Packaging - Specification container for transport



ECOBULK MX 1000 UN / DN150 TPE-g., G2-plug with vent / scr. ball-valve, FPM-g. / 2 label plates / Steel-framepallet

**SCHÜTZ GmbH & Co.KGaA
Schützstraße 12
D 56242 Selters / Germany**

**Date: 30.08.2006 / TE-KO / ss
Page 2 from 2**

Article - No.: 4004382

Construction:

Outer Container: Rectangular grid box made of tubular Steel material, with bottom plate, connected on top with tie-bar (assembled with brackets), label plate with Schütz-Ticket on front side, additional label plate on the back side.

Material: Grid / Bottom plate: Steel, galvanized
Corner Protector: 4 pieces made of PE-HD

Inner Container: Rectangular blow molded tank of high density polyethylene, with filling opening in the middle of the top section.
Discharge opening at the bottom of the front side.

Material: PE-HD, natural

Filling Opening: DN150 with external thread, closed with screw cap, G2-plug with vent, sealing-cap and gasket.

Material: Screw cap DN150: PE-HD, red
O-ring gasket: TPE
G2-plug: PP
O-ring G2-plug: EBA, natural
Vent: Silicone-Caoutchouc

Discharge Opening: Screwable ball-valve DN50 with grey handle and safety guard. Outlet sealed with an PE-lined Alu-film. Valve closed with screw cap, PE-disk and flat-gasket.
Outlet nozzle enclosed.

Material: Ball-valve housing: PE-HD, black
Flat-gasket: FPM
Ball-gasket: FPM
Screw cap DN50: PE-HD, black
Flat-screw cap: PE, foam
PE-disk: PE-HD, red
Outlet nozzle: PE-HD, natural

Pallet: Steel-framepallet (1000 x 1200 mm), 4-way entry
Material: Steel, galvanized

Heavy metals: Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100ppm

Delivery: Ready for filling

UN-Marking: UN 31 HA1 /

Technical subjects to change, all dimensions approximately