Installation Instructions for Standard and

Extended Temperature

Industrial Series

Optical Liquid Level Sensors

GENERAL DESCRIPTION

The LLC Industrial Series liquid level sensor provides single point liquid detection via a TTL compatible output.

This sensor range was designed to directly switch incandescent indicators, sounders, relays or applications which require higher output power.

An infra-red LED and phototransistor accurately positioned at the base of the sensing tip ensure good optical coupling between the two when the sensor is in air. When the sensing tip is immersed in liquid, the infra-red light escapes from the cone causing a change in the amount of light detected at the phototransistor which makes the output change state. Various electrical outputs are available to suit different applications.

CLEANING

Proper fluids should be selected based on type of contamination to be removed. SST Sensing recommends freon and alcohol based solvents. DO NOT use chlorinated solvents such as tricholorethane as these are likely to attack the sensor material.

LIQUID MEDIA COMPATIBILITY

Before use check that the fluid in which you wish to use these devices is compatible with either polysulphone or trogamid.

ELECTRICAL SPECIFICATIONS

| Supply Voltage (Vs) | +4.5 Vdc to +15.4Vdc or +8Vdc to +30Vdc | |
|--|---|--|
| Supply Current (Is) | Max 2.5mA (Vs = 15.4Vdc) or Max 7.5mA (Vs = 30Vdc) | |
| Output Type | An "L" in the part number after D3 indicates that the sensor output will be low in air. Otherwise the output will be high in air. | |
| Output Sink and Source Current (lout) | 1A | |
| Operating Temperatures | -25°C to +80°C (Standard) -40°C to +125°C (Extended) | |
| Storage Temperatures | -30°C to +85°C (Standard) -40°C to +125°C (Extended) | |


| Output Voltage (Vout) Vs = 4.5 - 15.4Vdc lout = 1A | Output High Vout = Vs - 1.5V Max Output Low Vout = 0V + 0.5V Max | |
|--|--|--|
| Output Voltage (Vout) Vs = 8 - 30Vdc lout = 1A | Output High Vout = Vs - 1.8V Max Output Low Vout = 0V + 0.7V Max | |
| Output Voltage (Vout) Vs = 4.5 - 15.4Vdc and Vs = 8 - 30Vdc Iout = 0mA | Output High Vout = Vs - 0.3V Max Output Low Vout = 0V + 0.1V Max | |

MOUNTING AND HOUSING TYPES

| Housing Series | 200 and 210 Series | 600 and 610 Series | 700 and 710 Series |
|----------------------------------|-------------------------------------|---------------------|--------------------|
| Thread | M12x1x8g with Hex Nut* | ½" SAE with O-Ring* | 1/4" NPT |
| Tightening Torque | 1.5 N m/13.26 in lb max. | | |
| Pressure (when correctly sealed) | 7 bar max | | |
| Mounting Hole | Ø12mm | Ø ½ Inch | 1/4" NPT Threaded |
| Housing Material | Polysulphone or Trogamid | | |
| Sensor Termination | 20AWG, 250mm PTFE Wires, 8mm Tinned | | |

^{*} Hex nut and o-ring sold separately, please contact us for details. NPT version can be sealed with PTFE tape.


Sensor Output Wiring



| WIRE | DESIGNATION |
|-------|-------------|
| RED | Vs |
| GREEN | OUTPUT |
| BLUE | 0V |




PART NUMBERING SYSTEM

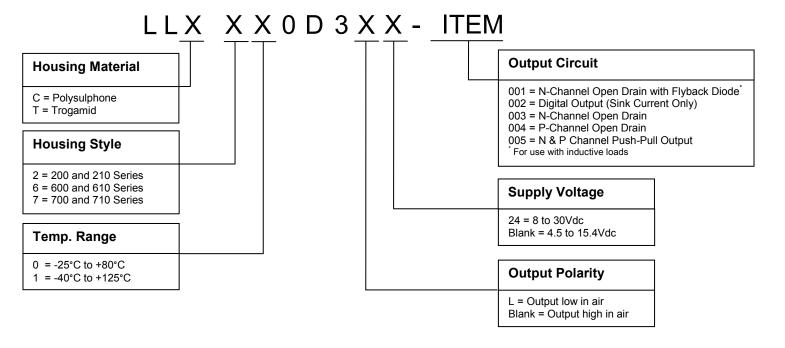

OUTPUT TYPES

In order to suit any application, these sensors have been designed with various output circuit configurations. They are identified by the a 3-digit code at the end of part number and are as follows:

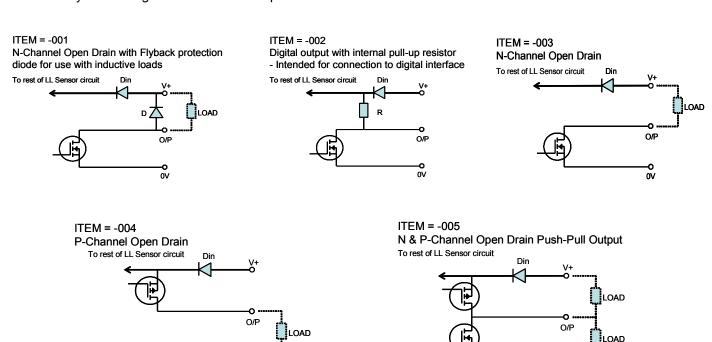

0V

PRODUCT DIMENSIONS

(all dimensions in mm)

M12x1 THREAD LLC200/210 Series Ø10.40 7.75 UNDERCUT FOR O-RING LLC600/610 Series 1/2" SAE-20 THREAD 2.50 11.70 1/4"NPT THREAD LLC700/710 Series 9.40 33.70

WARNING

Personal Injury

DO NOT USE these products as safety or

Emergency Stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

CAUTION

Do not exceed maximum ratings.

Although the sensor is protected against supply reversal, it is not recommended.

Do not overtighten screw-in type.

Do not use chlorinated solvents.

Do not mount with dome pointing downwards.

Failure to comply with these instructions may result in product damage.

It is the customer's responsibility to ensure that this product is suitable for use in their application. For technical assistance or advice, please emailus