


SQM 陶瓷电阻器 SQM CERAMICS RESISTOR



本体颜色: Body Color
 标准品: Standard (White 白色)
 标示: Marking
 文字: Alphanumeric (1W~100W)
 (根据客户要求提供相应标识)
 (According to the customer request to provide corresponding identification)

● 结构图 Construction

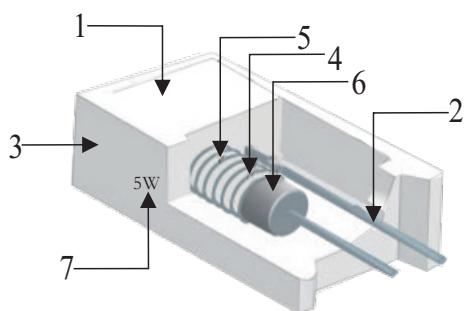

1	二氧化硅填充料	SiO ₂ materials
2	镀锡铜线	Tinned copper lead wire
3	陶瓷壳	Ceramic shell
4	玻纤棒或陶瓷棒	Glass core or ceramic core
5	线绕或氧化膜层	Wire-wound or metal oxide film
6	镀锡铁帽	Tinned iron cap
7	标示	Making

● 特性 Feature

- I 完全不可燃和高度绝缘性的安全设计
Compact type with safety design of non-flammability and insulation
- II 长期稳定性优良
Stable long life
- III 可提供低电感设计产品
Low inductance is available
- IV 符合欧盟RoHS要求
Products meet EU-RoHS

● 参考规格 Reference Standards


JIS C 5201-1

● 功率、阻值范围与耐电压 Power And Resistance etc

额定功率(W) Rated Power	阻值范围 Resistance Range(Ω)		最高使用电压 Max Working Voltage	最高负荷电压 Max Overload Voltage	耐电压 Dielectric Withstanding Voltage	温度系数 T.C.R
	皮膜型 Metal oxide film type	绕线型 Wire wound type				
1	100~39K	0.01~1K	150V	500V	1000V	皮膜型 Metal oxide film ±350PPM/°C 绕线型 Wirewound ±100PPM/°C
2	100~39K	0.01~2K	150V	750V		
3	100~39K	0.01~3K	350V	1000V		
5	100~50K	0.01~10K	350V	1000V		
7	100~100K	0.05~20K	500V	1500V		
10	100~100K	0.1~20K	750V	1500V		
15	100~100K	0.1~20K	1000V	1500V		
20	100~100K	0.1~20K	1000V	1500V		

SQM 陶瓷电阻器 SQM CERAMICS RESISTOR



外形尺寸 Dimensions

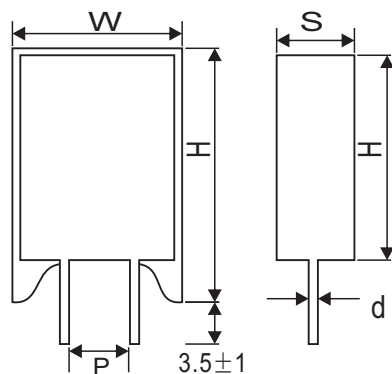

规格 Type	功率 Power	尺寸Dimensions(mm)				
		H±1.5	W±1	S±1	P±1	d±0.05
SQM	1W	10.0	10.0	5.2	5.0	0.65
	2W	20.5	11.0	7.0	5.0	0.75
	3W	25.0	12.0	8.0	5.0	0.75
	4W	25.0	13.0	10.0	5.0	0.75
	5W	25.0	13.0	10.0	5.0	0.75
	6W	39.0	13.0	10.0	5.0	0.75
	7W	39.0	13.0	10.0	5.0	0.75
	8W	39.0	13.0	10.0	5.0	0.75
	9W	51.0	13.0	10.0	5.0	0.75
	10W	51.0	13.0	10.0	5.0	0.75
	10WS	35.0	16.0	12.0	8.0	0.75
	15WS	35.0	16.0	12.0	8.0	0.78
	15W	40.0	20.0	10.0	8.0	0.80
	20W	50.0	20.0	10.0	10.0	0.80


额定温度下降曲线图 Derating Curve

例 Example

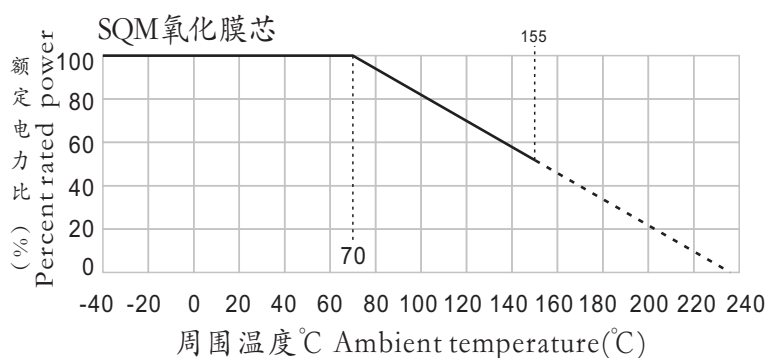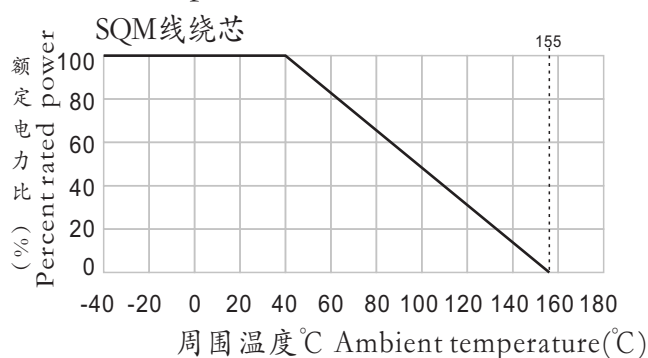

SQM 陶瓷电阻器 SQM CERAMICS RESISTOR

● 表面温升曲线 Temperature rising curve

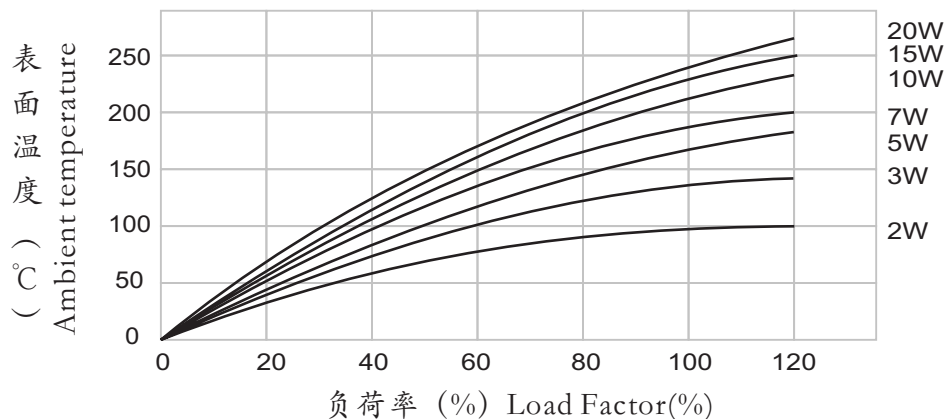

● 性能 Performance

试验项目 Test Items	规格值 Performance Requirements	试验方法 Test Methods(JIS C 5201-1)
电阻值 Resistance	规定的误差值内 Within specified tolerance	测量点从端盖10mm Measuring points are 10mm from the end cap
温度系数 T.C.R.	规定值内 Within specified T.C.R	室温+100°C Room temperature+100°C
短时间过负荷 Short time overload	±(1%+0.05Ω)	10倍额定功率, 5秒 10 times the rated power for 5 seconds
负荷寿命 Load life	±(5%+0.1Ω)	额定电压 70°C for 1,000 hours 1.5hr ON/0.5hr OFF Cycles
耐湿负荷寿命 Load life in humidity	±(5%+0.1Ω)	额定电压 40°C, 95% RH, 1000小时 Rated voltage at 40°C, 95%RH for 1,000 hours
温度循环 Temperature cycle	±(1%+0.05Ω)	5 cycles for -25°C (30min); room temp.(30min) ~+85°C (30min) room temp.(30min)
焊锡耐热 Resistance to soldering heat	±(1%+0.05Ω)	260°C ±5°C for 10 seconds(焊锡槽) 350°C ±10°C for 3.5 seconds(手焊锡)
绝缘电阻 Insulation resistance	> 100MΩ	500V 绝缘测试1分钟 500V insulation test 1min.

● 料号编号 ordering Information

例 example

SQM	01	J	R100	A
型号Type	额定功率 Rated Power	误差值 Tolerance	电阻值 (Ω) Resistance	特殊码 Serial code
SQM	01:1W 02:2W 07:7W 10:10W 25:25W	J ±5% F ±1% G ±2%	R100=0.1 1R00=1 10R0=10 1000=100	A1 绕线型 A1 Wirewound type A2 氧化皮膜型 A2 Metal oxide film type A3 绕线玻纤型 A3 Wirewound Glass core type A4 无感型 A4 Non-inductive

注意事项:

我们还提供如下性能的产品设计, 以满足你的需要:

- I 提供超小型尺寸产品设计和生产
- II 提供无电感产品设计和制作
- III 提供抗脉冲高压产品的设计和生
- IV 提供高稳定性和可靠性的军用品与工业品的产品设计和生产

如需更多支持, 请联系我们的工程师 kh@khxcom.com

To meet your request:

We also provide products for below functions:

- I Mini size design
- II Non-inductive products design
- III Anti-pulse high voltage design
- IV Design resistor for High stability and reliable military supplies and industrial products.

More details please contact with our engineer. kh@khxcom.com