

厦门纬轩机电设备有限公司

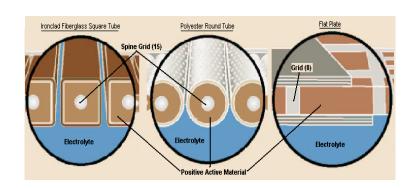


Plate Dimensions	Height	Width	Thickness
Positive	10.100	5.75	0.360
Negative	10.199	5.69	0.199

Nationwide Service

⇒ Nationwide service network to provide you with quality service backup.

Warranty

- ⇒ LMS
 - $\circ \quad \text{3 Year no-charge warranty} \\$
 - o 8 Year total pro rata warranty


4-LMS-450



Specifications

	Capacity	Number	5 sec. current		90 sec. current		Battery Dimensions		Battery Wt.		Electrolyte	
Battery	8 hr. rate @	of	77⁰F to	32 ⁰ F to	77⁰F to	32⁰F to	(in inches)			(charged / wet)		Wt.
Туре	77⁰F to	Plates	1.00 Vpc.	1.00 Vpc.	1.00 Vpc.	1.00 Vpc.	L	W	Н	Unpacked	Packed	lbs.
	1.70 Vpc.		(amp	eres)	(amperes)					lbs	lbs	
4-LMS-450	440 AH	17	2180	1725	1785	1345	4-cell ba		tery	270 294		60
	11 0 /\	17	2100	1723	1700	1040	28.50	7.40	18.00	210	234	00

Accessories



- De-Ionizers lon exchange medium that electrostatically removes dissolved impurities. Rated for 600 gallons of
 - pure water.
 - Increases battery life
 - "Purity Light"- signals when it's time to change cartridges.

De-Ionizer replacement cartridges-



- Watering Guns Gun G
 Automatic Shutoff and pressure regulator, no electronics, no wires.
 - High flow rate 2 gallon/minute.
 - Insulated against short circuits.
 - Narrow 5/8" nozzle, specially made for narrow vent openings.

