

精密制造·卓越品质
Precision manufacturing
excellent quality

河北仕航机械制造有限公司

Hebei Shihang Mechanical Equipment Co., Ltd

电话: 13503170903 13833775770

地址: 河北省沧州市泊头市经济开发区三号路



扫一扫二维码咨询我们



精于技术 专于质量
Technical expertise in quality

SHIHANG
MACHINERY

河北仕航机械制造有限公司

Hebei Shihang Mechanical Equipment Co., Ltd



公司简介

Company profile

河北仕航机械制造有限公司是一家具备研发、生产、销售为一体的公司。下设技术研发部门，提供产品技术改进与定制服务。产品核心部件，全部自行研发。经改进加工工艺，升级产品零部件的加工精度，以及工作精度，提升产品工作效率及质量。

我们专注于输送设备的制造，如转子泵、计量泵、齿轮泵、灌装机、包装设备等。我们有经验丰富的技术团队，先进的加工工艺，严格的检验流程，可提供具有竞争力的价格和高品质产品。我们的产品在美国，印度，中东，欧洲，非洲等国家和地区拥有良好的市场。

Hebei Shihang Machinery Manufacturing Co., Ltd. is a company with research and development, production, sales as one of the companies. Under the Technology R & D Department, to provide product technology improvement and customized services. Product core components, all self-development. By improving the processing technology, upgrade the product parts processing accuracy, as well as work accuracy, improve product efficiency and quality. We focus on the production of dry conveyor equipment, such as rotor pumps, metering pumps, gear pumps, filling machines, packaging equipment. We have experienced technical team, advanced processing technology, strict inspection process, can provide competitive prices and high-quality products. Our products in the United States, India, the Middle East, Europe,

Africa and other countries and regions have a good market.



企业文化

Enterprise culture

服务宗旨：创造有魅力的质量，造就忠实客户群体！

企业愿景：成为转子泵行业的领跑者！

企业宗旨：我们的追求是：更快、更新、更精！

企业使命：河北仕航创造一切不可能！

企业精神：团结、拼搏、求实、创新！

企业核心价值观：成功者找方法，失败者找理由。不要小看自己，人有无限可能！

Service tenet create attractive quality and create loyal customer groups!

Corporate vision: Become a leader in the rotor pump industry!

Enterprise tenet: our pursuit is: faster newer and more refined!

Corporate mission: Hebei ShiHang creates everything impossible!

Enterprise spirit unity, hard work, realism, innovation,!

Enterprise core values: Winners find ways, losers find reasons. Don't look down on yourself people have unlimited possibilities!

目录

01 泵头系列

腰型泵头.....	01
三叶泵头.....	01
一字泵头.....	01
普通泵盖.....	02
保温泵盖.....	02
亚克力泵盖.....	02
方形进口.....	03
圆形进口.....	03

02 料斗系列

立式普通料斗.....	04
立式搅拌料斗.....	04
立式搅拌加热料斗.....	04
方形料斗.....	05
方形加热料斗.....	05
卧式料斗.....	05
卧式搅拌料斗.....	06
卧式搅拌料斗加热.....	06

03 灌装阀系列

常规式灌装阀.....	07
全堵式灌装阀.....	07
短嘴式灌装阀.....	07
吹喷式灌装阀.....	08
全侵式灌装阀.....	08
酱料灌装阀.....	08

04 液位探测系列

浮球液位探测.....	09
探针液位探测.....	09
电容式探头探测.....	10
射频导纳探测.....	10

05 补液系统系列

补液隔膜泵.....	11
转子泵补液.....	11
底脚方式.....	11

06 配套转子泵系列

包装机配套转子泵.....	12
搅拌料斗转子泵配套.....	12

07 半自动灌装机系列

半自动卧式搅拌灌装机.....	13
半自动立式搅拌灌装机.....	14
SH系列半自动灌装机.....	15
SH系列半自动灌装机.....	16
SH卧式搅拌一体机.....	17
手持半自动灌装机.....	18
RX灌装机.....	18

三叶泵头

three-leaves rotor



- ◆ 适用范围：三叶转子适用高中低粘度膏体，液体，酱料，均匀不含硬杂质。
例：蜂蜜，蒜蓉辣酱，洗洁精，巧克力等。
Scope of application: Three-blade rotor is suitable for high, medium and low viscosity paste. Liquid, sauce, even without hard impurities such as honey and garlic hot sauce. High precision filing of detergent and other materials.
- ◆ 密封方式：特氟龙密封，特氟龙密封组，机械密封。
Sealing mode: Teflon sealing Teflon sealing group. Mechanical seal
- ◆ 材质：304,316,2205双相钢
Material 316L form: 304,316,2205 dual-phase steel



● 驱动方式：伺服电机，变频电机，定速电机。
Servo motor, variable frequency motor, constant speed motor

腰型泵头

waist



- ◆ 适用范围：软颗粒酱料，小颗粒物料不剪切不破坏。
例：果肉果酱，珍珠奶茶，豆瓣酱，蒜蓉辣酱。
Scope of application: soft particle paste, small particle material does not cut. Do not destroy.
Pulp jam, bubble tea, bean paste: garlic hot sauce.
- ◆ 密封方式：特氟龙密封，特氟龙密封组，机械密封。
Sealing mode Teflon sealing Teflon sealing group. Mechanical seal
- ◆ 材质：304,316
Material 316L form: 304,316,



● 驱动方式：伺服电机，变频电机，定速电机。
Servo motor, variable frequency motor, constant speed motor

一字泵头

one-leaf rotor



- ◆ 适用范围：硬度小颗粒物料
例：油泼辣子，火锅底料，浴盐，花生酱
Small granular material with hardness
Spicy oil seed, hot pot base, bath salt, peanut butter
- ◆ 密封方式：特氟龙密封，特氟龙密封组，机械密封
Sealing mode: Teflon sealing Teflon sealing group. Mechanical seal
- ◆ 材质：304,316,2205双相钢
Material 316L form: 304,316,2205 dual-phase steel



● 驱动方式：伺服电机，变频电机，定速电机。
Servo motor, variable frequency motor, constant speed motor

普通泵盖

heated pump cover



- ◆ 适用范围：转子泵标配泵盖，适用于大部分常规物料
例：面粉、果酱、果汁、洗衣液
Scope of application: Rotor pump with pump cover standard, suitable, for most conventional materials: batter, jam, juice, laundry detergent
- ◆ 材质：304,316,2205双相钢
Material 316L form: 304,316,2205 dual-phase steel
- ◆ 特点：符合卫生级食品医药标准，耐磨、防腐、不易损坏
Features: It conforms to hygienic food and medicine standards, and is wear-resistant, corrosion-resistant and not easy to be damaged.



保温泵盖

heated pump cover



- ◆ 适用于常温凝固物料。例：巧克力、蜂蜜、牛油底料
Suitable for room temperature solidification material
Chocolate, honey, butter base
- ◆ 工艺：抛光工艺
Process: polishing process
- ◆ 材质：304,316,不锈钢
Material: 304 stainless steel, 316 stainless steel
- ◆ 可用循环热水保温
Can be insulated with circulating hot water.



亚克力泵盖

transparent pump cover



- ◆ 方便观察泵体内转子与物料运转情况
It is convenient to observe the operation of the rotor and materials in the pump body
- ◆ 特点：卫生食品级
Features: Hygienic food grade
- ◆ 材质：亚克力
Material: acrylic.
- ◆ 适用于观察物料与转子运转
例：火锅底料、辣椒酱、油泼辣子
Suitable for observing material and rotor operation
Hot pot base, chill sauce, oil spicy seed



方形进口

Square Inlet



- ◆ 适用于高粘度物料，流动性差的物料
 例：芋泥，麦芽糖，橡皮泥，肉馅等物
 料灌装与输送
 Suitable for high viscosity material, poor flow
 material Such as taro paste, maltose, plasticine,
 meat filling and conveying materials
- ◆ 密封方式：特氟龙密封，特氟龙密封组，
 机械密封
 Sealing method: Teflon seal, Teflon seal
 group and mechanical seal.
- ◆ 安装方式：上进下出
 Installation mode upper and lower
- ◆ 工艺：抛光工艺
 Process: polishing process
- ◆ 材质：304,316,2205双相钢
 Material: 304,316,2205 double phase steel

圆形进口

Round Inlet



- ◆ 材质：304,316,2205双相钢
 Material: 304,316,2205 double phase steel
- ◆ 安装方式：水平进出，上进下出
 Installation mode: Horizontal entry and exit,
 upward entry and downward entry
 方便输送与灌装使用
 Convenient transportation and filling
- ◆ 机器标配，可适用于大部分常规物料
 例：面糊、果汁、洗衣液
 The machine comes standard, which can be applied
 to most conventional materials. Batter, juice,
 laundry detergent
- ◆ 工艺：抛光工艺
 Process: polishing process

立式普通料斗

vertical hoppe



- ◆ 型号：30L,50L
 model: 30L,50L
- ◆ 适用液体，膏体，酱料，物料自具流动性
 例：豆瓣酱、牙膏、沙拉酱
 Suitable for liquids, pastes, sauces and materials with
 their own fluidity. For example, bean paste, toothpaste
 and salad dressing.
- ◆ 材质：304/316不锈钢
 Material: 304 /316 stainless steel

立式搅拌料斗

Vertical mixing hopper



- ◆ 型号：30L,50L
 model: 30L,50L
- ◆ 适用于有颗粒物料，固液分离物料
 例：辣椒酱、剁椒酱、香菇酱
 Suitable for granular materials and solid-liquid
 separation materials. Examples are Chili sauce, chopped
 pepper sauce and mushroom sauce.
- ◆ 材质：304/316不锈钢
 Material: 304 /316 stainless steel
- ◆ 电机功率：300W
 Motor power: 300W

立式搅拌加热料斗

Vertical mixing and heating hopper



- ◆ 电机功率：300W
 Motor power: 300W
- ◆ 适用凝固物料，颗粒物料
 例：巧克力、牛油底料、工业黄油
 Suitable for solidified materials, granular materials
 Examples: chocolate, butter base, industrial butter
- ◆ 加热方式：水加热，电热片加热
 Heating mode: water heating, electric heating
- ◆ 材质：304/316不锈钢
 Material: 304 /316 stainless steel



方形料斗

Square Hopper



- ◆ 型号：50L/100L
model: 30L,50L
- ◆ 适用领域：粘稠性物料，无流动性物料
例：肉馅、肉酱、面糊、果酱
Application: viscous materials, non-flowing materials Examples are meat stuffing, meat sauce, batter and jam.
- ◆ 材质：304/316不锈钢
Material: 304 /316 stainless steel



方形加热料斗

Square heating hopper



- ◆ 型号：50L/100L
model: 50L、100L
- ◆ 适用领域：粘稠性且凝固物料
例：巧克力、麦芽糖、树脂
Application: viscous and solidified materials
Examples: chocolate, maltose, resin
- ◆ 材质：304/316不锈钢
Material:304 /316 stainless steel
- ◆ 加热方式：水加热，电加热
Heating mode: water heating and electric heating



卧式料斗

Horizontal Hopper



- ◆ 型号：80L/150L/200L/300L
model: 80L/150L/200L/300L
- ◆ 大容量料斗，可存储更多物料
适用于大剂量物料灌装
Large-capacity hopper can store more materials.
Suitable for filling large dose materials.
- ◆ 材质：304/316不锈钢
Material:304 /316 stainless steel

卧式搅拌料斗

Horizontal mixing hopper



- ◆ 型号：80L/150L/200L/300L
model: 80L/150L/200L/300L
- ◆ 适用领域：沉淀物料，含油含颗粒物料
例油泼辣子，火锅底料、辣椒酱
Application fields: precipitated materials, oily and granular materials, Spicy oil seed, chafing dish bottom material, Chili sauce
- ◆ 材质：304/316不锈钢
Material:304 /316 stainless steel
- ◆ 驱动装置：蜗轮蜗杆调速电机750W
Motor: Commissioning motor 750W



卧式搅拌加热料斗

horizontal mixing heating hopper



- ◆ 型号：80L/150L/200L/300L
model:80L/150L/200L/300L
- ◆ 适用领域：沉淀且凝固物料
例：牛油火锅底料，牛油酱
precipitate and solidified material,
butter hot pot base, butter sauce
- ◆ 加热方式：水加热，电加热
Heating mode: water heating and electric heating
- ◆ 材质：304/316不锈钢
Material:304 /316 stainless steel
- ◆ 驱动装置：蜗轮蜗杆调速电机750W
Motor : commissioning motor 750W





常规式灌装阀

Conventional filling valve



- ◆ 尺寸：16灌装阀4-14MM
25灌装阀8-20MM、35 灌装阀28MM
Size: 16 filling valve 4-14mm
25 filling valve 8-20mm, 35 filling valve 28mm
- ◆ 可灌装含软颗粒、油水分离严重复杂的物料
灌装嘴可更换不同口径(4-28MM)
Filling with soft particles, oil and water separation serious, complex materials, filling nozzle change different calibre
- ◆ 材质：304/316不锈钢
Material: 304 /316 stainless steel

全堵式灌装阀

Fully blocked filling valve



- ◆ 尺寸：14MM、18MM
Size: 14mm, 18mm
- ◆ 适用于灌装容易滴漏、积料的介质
膏体液体均可灌装，清洗方便
例：蜂蜜，白乳胶，树脂，芝麻酱
It is suitable for filling materials which are easy to drip and accumulate. Paste liquid can be filled and cleaned conveniently. For example, honey, white latex, resin, sesame paste.
- ◆ 材质：304/316不锈钢
Material: 304 /316 stainless steel

短嘴式灌装阀

Short nozzle filling valve



- ◆ 尺寸：14MM、20MM
Size: 14mm, 20mm
- ◆ 适用于小颗粒物料酱料灌装
例：油泼辣子，花生酱，蒜蓉辣酱，甜辣酱
Suitable for filling small granular materials with sauce. Examples: oil spicy seeds, peanut butter, garlic hot sauce, sweet hot sauce
- ◆ 特点：不拉丝，不卡料，不滴料
Features: Suitable for small particle materials, without drawing or jamming

吹喷式灌装阀

blow filling valve



- ◆ 适用于拉丝、粘黏物料
例蜂蜜、芝麻酱、沙拉酱
Suitable for wire drawing and sticky materials. Example: honey, sesame sauce and salad dressing
- ◆ 材质：304/316不锈钢
Material: 304 /316 stainless steel
- ◆ 特点：中心喷吹设计，杜绝滴漏现象
Features: Central jet design to prevent dripping

全浸式灌装阀

full-immersion filling valve



- ◆ 适用于易起泡的物料
例：酱油，醋，牛奶，果汁
Suitable for foaming materials
- ◆ 材质：304/316不锈钢
Material: 304 /316 stainless steel
- ◆ 特点：加长版灌装阀，配合升降台适用
Extended version filling valve, with lifting platform for

酱料灌装阀

Sauce filling valve



- ◆ 适用于颗粒酱料，粘稠物料
例豆瓣酱、牛肉酱、香菇酱，火锅底料
Suitable for granular sauces. For example, bean paste, beef paste and mushroom paste
- ◆ 特点：不滴料，不卡料
Features: no dripping, no jamming.
- ◆ 材质：304/316不锈钢
Material: 304/316 stainless steel



浮球液位探测

Float level detection



- ◆ 适用范围广泛、耐高温、耐腐蚀
例：汤汁、洗衣液、果汁
Wide application range, high temperature resistance and corrosion resistance.
Example: soup, laundry detergent and fruit juice.
- ◆ 材质：304/316不锈钢
Material:304 /316 stainless steel
- ◆ 特点：反应灵敏，结构简单，工作寿命长
Features: Sensitive response, simple structure, long working life



探针液位探测

probe level monitoring



- ◆ 适用于可导电的液体，膏体，酱料
例：洗衣液，果汁，火锅底料
Suitable for conductive liquids, pastes and sauces
Example: laundry detergent, fruit juice, chafing dish bottom material
- ◆ 材质：304/316不锈钢
Material:304 /316 stainless steel
- ◆ 特点：导电性强，结构简单、安装方便、可耐高温，高低液位可自行调节
Features: strong conductivity, simple structure, convenient installation, High temperature resistance. high and low liquid levels can be adjusted by themselves.

电容式探头探测

blow filling valve



- ◆ 适用于高粘性物料，酱料
例：润滑油、胶水、蜂蜜、花生酱、墨水
Suitable for highly viscous materials and sauces.
Grease, glue, honey, peanut butter, ink.
- ◆ 材质：头部PeeK，外壳316不锈钢材质
Material: Peek head, shell 316 stainless steel.
- ◆ 特点：灵敏度高，抗残留，抗气泡，抗结痂，耐腐蚀
High sensitivity, residue resistance, bubble resistance, scabbing resistance and corrosion resistance

射频导纳探测

Radio frequency admittance detection



- ◆ 适用于酱料，高温物料，高粘度物料
例：巧克力、汤汁、火锅底料
Suitable for sauces, high temperature materials and high viscosity materials. Examples: chocolate, soup, chafing dish base.
- ◆ 材质：304/316不锈钢
Material:304 /316 stainless steel
- ◆ 特点：抗沾附防挂料、性能稳定，反应迅速
◆ 抗干扰性强
Features: Anti-adhesion and anti-hanging, stable performance and quick response. Strong anti-interference



补液隔膜泵

diaphragm pump



- ◆ 气动电磁阀控制隔膜泵，液位探测液位高度后把信号传递给电磁阀控制隔膜泵的补料开关
Pneumatic solenoid valve control diaphragm pump liquid level detection of the height of the signal transmitted to the solenoid valve, control the diaphragm pump feed switch
- ◆ 型号：DN40/DN50/DN65
model:DN40/DN50/DN65
- ◆ 适用于低粘度物料，例汤汁、牛奶、果汁
Suitable for low viscosity materials, such as soup, milk and fruit juice.



转子泵补液

lobe pump



- ◆ 配电箱控制转子泵，液位探测仪位高度后把信号传递给配电箱，控制转子泵的补料开关。
The distribution box controls the rotor pump, and the liquid level detector sends the signal to the distribution box after the height of the liquid level, and controls the feeding switch of the rotor pump.
- ◆ 适用于粘稠物料，颗粒酱料
清洗方便，拆卸简单
Suitable for viscous materials and granular sauces. Convenient cleaning and simple disassembly

底脚方式

bottom foot



- ◆ 小脚杯，大脚杯，不锈钢框架
(尺寸可定制)
Small goblet, big goblet, stainless steel frame
(size can be customized)

包装机配套转子泵

Packing machine with rotor pump



- ◆ 泵头+行星减速机+伺服电机(光面护罩)
Pump Head + planetary reducer + servo motor (smooth cover)
- ◆ 驱动器外置，(可配5米或10米延长线)
Drive external, (can be equipped with 5 meters or 10 meters extension cord)
- ◆ 该机是针对包装机生产商配套设计的可直接连接包装机系统
This machine is designed for packaging machine manufacturers, can be directly connected to the packaging machine system
- ◆ 适用范围：洗衣液，蜂蜜，沙拉酱，巧克力等
Application: detergent, honey, salad dressing, chocolate, etc



搅拌料斗转子泵配套

lobe pump with horizontal mixing hopper



- ◆ 泵头+行星减速机+伺服电机(光面护罩)
Pump Head + planetary reducer + servo motor (smooth cover)
- ◆ 搅拌料斗驱动装置：蜗轮蜗杆调速电机750W
Mixing hopper driving device: worm gear and worm speed regulating motor 750w
- ◆ 针对包装机生产商配套设计的可直接连接包装机系统
This machine is designed for packaging machine manufacturers. can be directly connected to the packaging machine system
- ◆ 适用范围：辣椒酱，火锅底料，油泼辣子等
the scope of application: Chili Sauce, hotpot base, Chill oil, and other granular sauces



半自动卧式搅拌灌装机

semi-automatic horizontal mixing filling machine



- ◆ 电源：220V/50HZ
Power supply: 220V/50HZ filling
- ◆ 卡盘：50.5mm/64mm/77.5mm
Chuck: 50.5 mm/64mm/77.5 mm
- ◆ 灌装阀：活塞式防滴漏
Filling valve: Piston Type anti-drip
- ◆ 外接启动：脚踏开关、接近开关、光感开关
External start: foot switch, proximity switch light switch
- ◆ 驱动控制：伺服电机+PLC脉冲控制
Drive control: servo motor PLC pulse control
- ◆ 搅拌料斗驱动装置：蜗杆涡轮调速电机750W
Mixing hopper driving device: worm turbine speed regulating motor 750W
- ◆ 配用气量：≤0.1m³/min
本机器为电动仅防滴漏阀门消耗气量
Air consumption: ≤0.1 m³/min this machine
iselectric only anti-dripvalve consumption of

产品规格	灌装量/单次ML	电机功率KW	误差g	口径mm	长x宽x高cm	重量kg
Product specifications	Filling volume/ML	Motor Power	Error	Caliber	Length x width x height	Weight
SH-1800	5-100000	1.75KW	≤1g	38	75 × 29 × 29	30.00
SH-3600	10-200000	2.25KW	≤1g	51	100 × 29 × 40	50.00
SH-6000	20-300000	3.05KW	<1g	64	60 × 23.5 × 24	90.00

- ◆ 该机是针对酱料，含沉淀颗粒物料灌装而设计的半自动灌装机
搅拌出料均匀，灌装误差小
This machine is a semi-automatic filling machine designed for filling sauces and materials containing precipitate particles,
- ◆ 适用范围：辣椒酱，火锅底料，油泼辣子等各种颗粒酱料
Applicable range: chilli sauce, chafing dish base, Chili oil, and other granular sauces
- ◆ 料斗可选择，加热，保温加热料斗
Hopper can be selected, heated, and heated byheat preservation.



半自动立式搅拌灌装机

semi-automatic vertical mixing filling machine



- ◆ 电源：220V/50HZ
Power supply: 220V/50HZ filling
- ◆ 卡盘：50.5mm/64mm
Chuck: 50.5 mm/64mm
- ◆ 灌装阀：活塞式防滴漏
Filling valve: Piston Type anti-drip
- ◆ 外接启动：脚踏开关、接近开关、光感开关
External start: foot switch, proximity switch light switch
- ◆ 驱动控制：伺服电机+PLC脉冲控制
Drive control: servo motor PLC pulse control
- ◆ 搅拌料斗驱动装置：减速机调速电机300W
Driving device of mixing hopper: speed regulating motor of reducer 300W
- ◆ 配用气量：≤0.1m³/min
本机器为电动仅防滴漏阀门消耗气量
Air consumption: ≤0.1 m³/min this machine
iselectric only anti-dripvalve consumption of

产品规格	灌装量/单次ML	电机功率KW	误差g	口径mm	长x宽x高cm	重量kg
Product specifications	Filling volume/ML	Motor Power	Error	Caliber	Length x width x height	Weight
SH-900	5-100000	1.75KW	≤1g	38	75 × 29 × 29	30.00
SH-1800	10-200000	2.25KW	≤1g	51	100 × 29 × 40	50.00
SH-3600	20-300000	3.05KW	<1g	64	60 × 23.5 × 24	90.00

- ◆ 该机是针对一些含颗粒沉淀不严重，液体含量较少的物料灌装而设计的半自动灌装机
This machine is a semi-automatic filling machine which is designed for filling some materials with less particles and less liquid
- ◆ 适用范围：果汁，剁椒酱，香菇酱，牛肉酱
Applicable scope: fruit juice, chopped pepper paste
- ◆ 料斗可选择，加热，保温加热料斗
Hopper can be selected, heated, and heated byheat preservation.



SH 系列半自动灌装机

SH-Series of semi-automatic filling machine



- ◆ 电源：220V/50HZ
Power supply: 220V/50HZ filling
- ◆ 卡盘：50.5mm/64mm/77.5mm
Chuck:50.5 mm/64mm/77.5 mm
- ◆ 灌装阀：活塞式防滴漏
Filling valve: Piston Type anti-drip
- ◆ 外接启动：脚踏开关，光感开关，接近开关
External start: foot switch, light switch, proximity switch.
- ◆ 驱动控制：伺服电机+PLC脉冲控制
Drive control: servo motor PLC pulse control
- ◆ 配用气量：≤0.1m³/min
本机器为电动仅防滴漏阀门消耗气量
Air consumption:≤0.1 m³/min this machine iselectric only anti-dripvalve consumption of ait

理论流量				压力	转速	进出口口径	泵头	电机功率	尺寸	重量
L/100r	L/h	Gai/min	m³/H	MAP/(兆帕)	r/min	DN		KW	CM	公斤
3	900	3.9	0.9	0.4	50-500	32mm	304/316材质	0.75kW	25*18CM	13公斤
4	1200	5.2	1.2	0.6	50-500			1KW	25*18CM	13公斤
6	1800	8	1.8	0.6	50-500	1KW		35*23CM	30公斤	
8	2300	10.1	2.3	0.6	50-500	1.5KW		35*23CM	30公斤	

- ◆ 适用范围：芝麻酱，食用油，蜂蜜花生酱、洗衣液、沙拉酱等
Scope of application: sesame paste, edible oil and honey. Peanut butter, laundry detergent, salad dressing, etc.

- ◆ 该机是针对液体、膏体物料灌装而设计的半自动灌装机，定量精准，灌装范围广
The machine is aimed at liquid, paste material filling and design of semi-automatic filling machine, quantitative precision, filling a wide range



SH系列半自动灌装机

SHSeries of semi-automatic filling machine



- ◆ 电源：220V/50HZ
Power supply: 220V/50HZ filling
- ◆ 卡盘：50.5mm/64mm/77.5mm
Chuck:50.5 mm/64mm/77.5 mm
- ◆ 灌装阀：活塞式防滴漏
Filling valve: Piston Type anti-drip
- ◆ 外接启动：脚踏开关，光感开关，接近开关
External start: foot switch, light switch, proximity switch.
- ◆ 驱动控制：伺服电机+PLC脉冲控制
Drive control: servo motor PLC pulse control
- ◆ 配用气量：≤0.1m³/min
本机器为电动仅防滴漏阀门消耗气量
Air consumption:≤0.1 m³/min this machine iselectric only anti-dripvalve consumption of ait

1	设备名称	SH系列半自动灌装机(2300)
2	电源	220v 50HZ
3	卡盘	50.5MM/64MM/77.5MM
4	灌装阀	活塞式防滴漏
5	灌装模式	自动、手动、点动、脚踏
6	驱动控制	伺服电机+PLC脉冲控制
7	适用类型	液体、各种膏体、及含颗粒酱类、非易燃易爆化工类酱料
8	灌装范围	5--10000克
9	灌装精度	(+/-2克)根据物料决定
10	灌装速度	10--45L/每分钟
11	灌装材质	过流部件均为304不锈钢材质
12	电机功率	1.5KW

- ◆ 适用范围：芋泥，肉馅，豆沙馅、果肉果酱、树脂、麦芽糖




Scope of application: taro paste, meat stuffing and bean paste stuffing Fruit jam, resin, maltose

- ◆ 该机是针对膏体，流动性较差的物料灌装而设计的半自动灌装机，进料流畅，定量精准

This machine is a semi-automatic filling machine designed for filling paste, poor flow of materials, feeding smooth, quantitative precision

SH卧式搅拌一体机

WGTX horizontal mixe

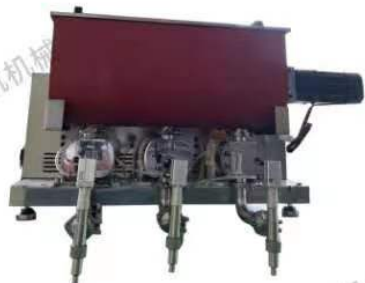

- ◆ 电源：220V/50HZ
Power supply: 220V/50HZ filling
- ◆ 卡盘：50.5mm/64mm
Chuck: 50.5 mm/64mm
- ◆ 灌装阀：活塞式防滴漏
Filling valve: Piston Type anti-drip
- ◆ 外接启动：脚踏开关、接近开关、光感开关
External start foot switch, proximity switch light switch
- ◆ 驱动控制：伺服电机+PLC脉冲控制
Drive control: servo motor PLC pulse control
- ◆ 搅拌料斗驱动装置：蜗杆涡轮调速电机
Mixing hopper driving device, worm turbine speed regulating motor 750W
- ◆ 配用气量：≤0.1m³/min
本机器为电动仅防滴漏阀门消耗气量
Air consumption: ≤0.1 m³/min this machine iselectric only anti-dripvalve consumption of ait

产品规格	灌装量/单次ML	电机功率KW	误差g	口径mm	长x宽x高cm	重量kg
Product specifications	Filling volume/ML	Motor Power	Error	Caliber	Length x width x height	Weight
SH-1800	5-100000	1.75KW	≤1g	38	110×41×135	50.00
SH-3600	5-100000	2.25KW	≤1g	51	110×41×140	50.00

- ◆ 针对酱料，含沉淀颗粒物料灌装而设计的半自动灌装机，搅拌出料均匀，灌装误差小
The semi-automatic filling machine designed for the filling of sauces and materials containing precipitated particles has the advantages of uniform mixing and discharging, and small filing error
- ◆ 可自由移动结构紧凑，不占用空间自带工作台
Can move freely, compact structure, does not takeup space with its own workbench
- ◆ 适用范围：辣椒酱，火锅底料，油泼辣子等各种颗粒酱料
Scope of application: chili sauce, hot pot base material, oil chili seed and other granular sauce
- ◆ 料斗可选择，加热，保温加热料斗
Hopper can be selected, heated, and heated by heat preservation



手持半自动灌肠机

Hand-held semi-automatic filling machine



- ◆ 该机针对小容量灌装，烘焙行业注浆使用
The machine for small volume filling, baking industry grouting
- ◆ 适用范围：蛋糕液，奶油
application range: cake liquid, cream
- ◆ 多种灌装模式：自动/手动/点动/脚踏
Multiple filling modes: automatic manual point-to-point pedals



产品规格	灌装量/单次ML	电机功率KW	深差g	口径mm	长x宽x高cm	重量kg
Product specifications	Filling volume/ML	Motor Power	Error	Caliber	Length x width x height	Weight
SH-900	5-50000	0.75KW	≤1g	32	60×23.5×24	30.00
SH-1800	5-100000	1KW	≤1g	38	75×29×29	50.00

RX 灌装机

Rx filling machine



产品规格	灌装量/单次ML	电机功率KW
Product specifications	Filling volume/ML	Motor Power
SH-900	5-30000	1KW
口径mm	误差g	重量kg
Caliber	Error	Weight
32.00	≤1g	25-30kg

- ◆ 适用于黄豆酱，珍珠奶茶，水泥
Suitable for soy bean paste, bubble tea, cement



- ◆ 该机是针对含杂质液体设计生产可灌装含杂质颗粒物料
The machine is designed for the production of liquidcontaining impurities, can be filled with particles containing impurities materials